



ADJUSTABLE BRACKET

Use: allows rails to be joined at variable angles



TECHNICAL CHARACTERISTICS

Material	Stainless steel 304 A2
Weight	35.3 g

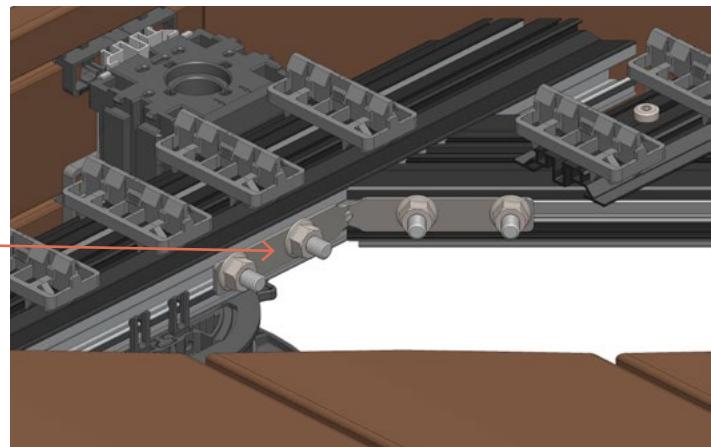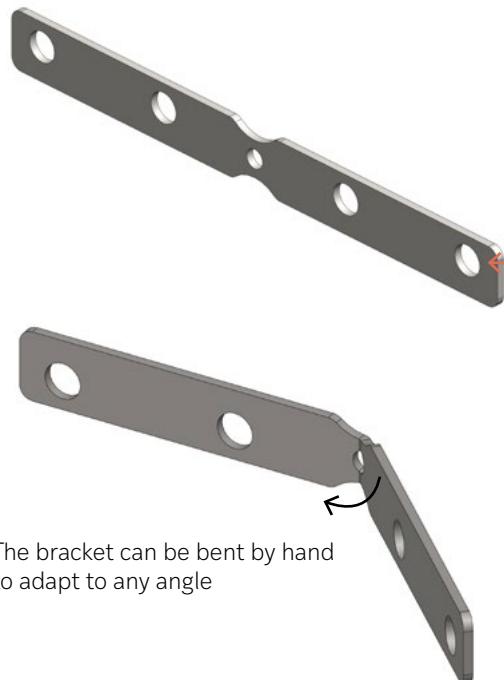


Visual	Ref. Kit	Ref. Piece	Qty	Description	Material
	3075	2869	2	Adjustable bracket for variable angles 160 x 16 x 2 mm	Stainless steel 304 A2
		1252	8	Hammerhead bolt M8/20 mm	Stainless steel A2
		72666	8	Flange nut M8	Stainless steel A2
	3076	2869	2	Adjustable bracket for variable angles 160 x 16 x 2 mm	Stainless steel 304 A2
		72583	8	Sliding bolt M6/16 mm	Stainless steel A2
		72584	8	Flange nut M6	Stainless steel A2

RAIL COMPATIBILITY


Adjustable bracket M6 ref. 3076



Top Rail



PR24




UR18




Adjustable bracket M8 ref. 3075




PR39




PR56




UR33

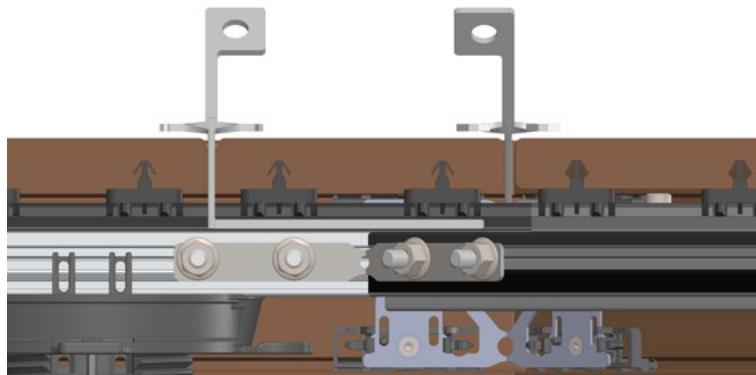

The dismantling keys can still be used, but do not prevent the clips from being removed.

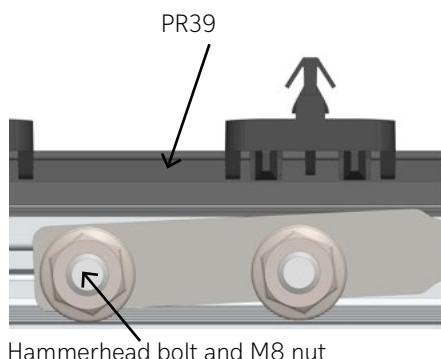

Hammerhead bolt and M8 nut

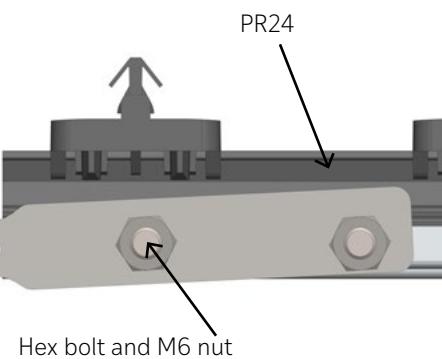

Hex bolt and M6 nut

Two different rails can be linked together. For example, a PR39 rail and a PR24 rail, or a UR33 and UR18 rail.

Use the appropriate screws for each rail.

